

SLIMLINE DESIGN. ULTIMATE CONTROL.


Architectural slimline design meets light filtering glass technology. The Decor Series utilizes Aura's carbon fiber braid element technology and takes visible light reduction a step further, with a light filtering ceramic glass panel. Transparent to Infrared heat, the glass allows passage of Infrared rays while further reducing visible light output. This heater brings performance while blending into architecturally focused spaces.

KEY FEATURES

- Ceramic Glass panel front
- IP65 water protection for outdoor use
- Instant, directional heat

- Bluetooth App and Remote Control
- 8000 hour element life
- 304 stainless steel glass trim

HEATER CONFIGURATIONS



BLUETOOTH CONTROL







3000W | 240V 2250W | 208V



*Indicates heater color. B = Black. W = White.

Pictures above show in 3000W heaters with element on.







DECOR SERIES MODELS


					DIMENSIONS	
MODEL	WATTS	VOLTS	AMPS	BTUS	LENGTH	WIDTH
ADGLASS30240*	3000	240	12.5	10200	42.6" (1083mm)	5.5" (140mm)
(BLACK/WHITE)	2250	208	10.8	7675	42.0 (1083mm)	3.3 (140mm)
ADGLASS15120* (BLACK/WHITE)	1500	120	12.5	6100	31" (797mm)	5.5" (140mm)

^{*240}V heaters may be used at 208V. De-rating heaters reduces heater output by approximately 25%

HEATING COVERAGE PATTERNS


MODEL	WIDTH	DEPTH	HEIGHT
ADGLASS30240*	10' (3.1m)	6' (1.8m)	8' (2.4m)
ADGLASS15120*	7' (2.1m)	5' (1.5m)	8' (2.4m)


Heater coverage area may be reduced in highly exposed area. Contact dealer for specifying support.



CLEARANCES AND MOUNTING OPTIONS

MODEL	FLOOR (USA)	FLOOR (CANADA)	CEILING (WALL MOUNT)	CEILING (CEILING MOUNT)	END	SIDE	MOUNTING OPTION
ADGLASS30240*	6'7" (2.0m)	8' (2.4m)	8" (203mm)	7.5" (190mm)	20" (508mm)	20" (508mm)	WALL OR CEILING
ADGLASS15120*	6'7" (2.0m)	8' (2.4m)	8" (203mm)	7.5" (190mm)	20" (508mm)	20" (508mm)	WALL OR CEILING

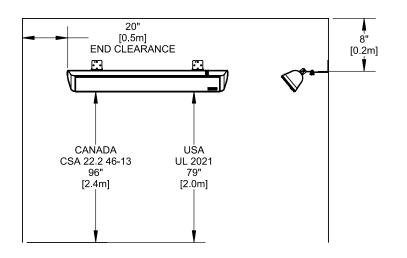

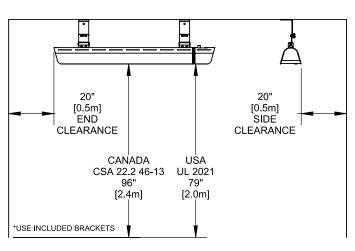

INCLUDED PARTS



HANDHELD REMOTE



ADJUSTABLE WALL AND CEILING BRACKETS



OPTIONAL CEILING SUSPENSION RODS (SOLD SEPARATELY)



